

MEISER[®]

New MEISER grating fastening


Developed together with the fastening specialists HILTI




Benefits of the new MEISER-HILTI grating clamp


- ▶ High resistance against vibration
- ▶ Easy installation from the top of the Grating, removing the need for expensive access equipment from below
- ▶ **Integrated system:**
Clamps are supplied pre-assembled as one unit, no loose parts to worry about
- ▶ For mesh widths of 22 to 36 mm and grating heights of 25 to 40 mm (other sizes on request)
- ▶ Simple adjustment; removable and tightening of loose clamps
- ▶ Clamps are supplied hot-dip galvanised finish

Easy Installation – High Safety:

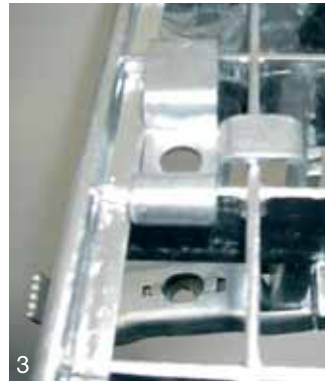

Clamping Type X-MGR M 60:

Installation quantity/hour	240
Suitable Grating Meshes	
	Mesh Spacing a (min – max) 22 – 36 mm Bearing Bar Height b (min – max) 25 – 40 mm
Bearing Bar thickness	2 – 3 mm *
Indoors	••
Outdoors	••
Sea water	–
Vibration resistant	•
Vehicle traffic	–
Recommended installation tool	electric screwdriver
Torque in Newton Meter (Nm)	5 – 8 (Nm)
HILTI Screwdriver setting	4 – 7
Material flange/screw	hot-dip galvanised

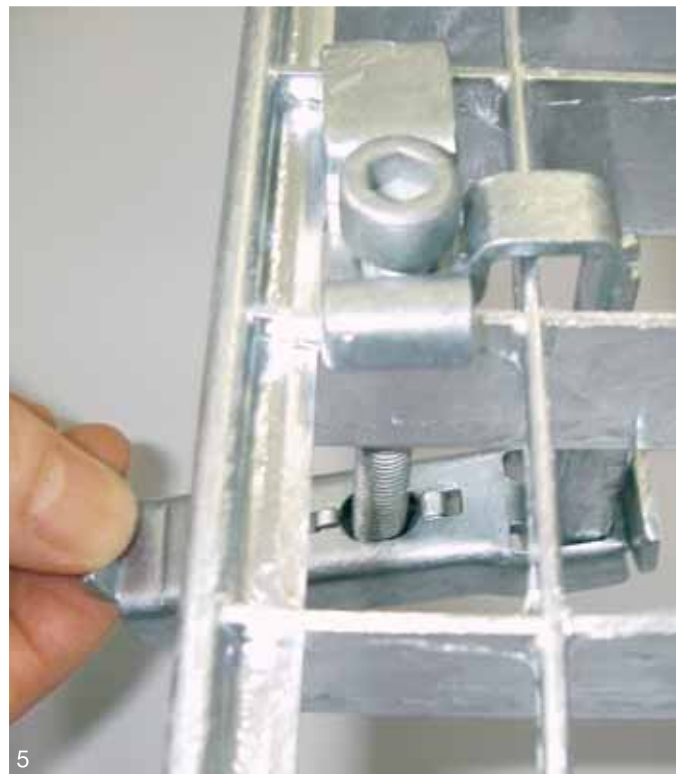

•• Recommended, • Suitable, – Not recommended. * Other types on request. No liability whatsoever can be accepted for use other than that recommended.

Gebr. Meiser GmbH . Schmelzer Straße . D-66839 Schmelz-Limbach . **Telefon** +49 (0) 68 87/3 09-0
Fax +49 (0) 68 87/3 09-3131 . **e-Mail** info@meiser.de . **Internet** www.meiser.de

Meiser Gitterroste KG . Am Lehrteich 3 . D-08606 Oelsnitz . **Telefon** +49 (0) 3 74 21/50-0 . **Fax** +49 (0) 3 74 21/50-2120
e-Mail info@meiser.de . **Internet** www.meiser.de